



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

EP00/01231

4

REC'D 05 MAY 2000

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99109791.6

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts:  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

25/04/00

**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 99109791.6

Anmeldetag:  
Date of filing:  
Date de dépôt: 18/05/99

Anmelder:  
Applicant(s):  
Demandeur(s):  
SIEMENS AKTIENGESELLSCHAFT  
80333 München  
GERMANY

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Method of transmitting and/or receiving synchronisation sequences

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

18. Mai 1999

1

## Description of invention

Method of transmitting and/or receiving synchronisation sequences

5

Two PSC schemes have been presented in patent applications, namely the hierarchical correlation in DE 19840974.5 and the Golay sequence in DE 19918874.2.

10 Both schemes allow an efficient computation of the correlation in the mobile station and have been shown to have good correlation properties. For the working assumption simulations under high frequency errors have already been presented

15 In order to avoid lengthy arguments about marginal relative merits of these two PSC schemes we propose to combine their advantages in a harmonised proposal. That means we propose to use a hierarchical sequence, built from two length 16 constituent sequences, which are themselves hierarchical sequences  
20 and their constituent sequences are Golay sequences.

We show that this proposal has a lower complexity than each of the above mentioned PSC schemes while maintaining the synchronisation properties even under high frequency errors. We therefore suggest to use this harmonised approach for the  
25 PSC.

Such a selection of the PSC would also simplify the pending decision about the SSC scheme by narrowing down the number of necessary simulations to be considered, because the performance of a SSC scheme can only be judged in combination with  
30 a particular PSC scheme.

The paper is organised as follows:

- First we present the proposed PSC
- Second we show how it can be utilised for efficient correlation and show that the complexity is lower than for any  
35 of the previous proposal

- Third we present simulations results under no and high frequency error
  - Finally we propose this new PSC code to be used and provide a text proposal for S1.13
- 5 In this contribution we show that there is almost no difference in slot synchronisation performance for the proposed code in comparison to the working assumption.

### Generalised Hierarchical Golay Sequence

For the 1<sup>st</sup> step of cell search procedure the working assumption for UMTS is to use a hierarchical correlation sequence for the PSC code. The code is generated by two constituent sequences, using the formula

$$y(i) = X_2(i \bmod 16) \cdot X_1(i \div 16) \quad \text{for } i = 0 \dots 255$$

15 Note that in this representation the elements of the binary sequences are  $\{-1, +1\}$ . Then the multiplication has to be changed against exclusive or operation to achieve equivalent results.

We now propose to combine the advantages of the generalised hierarchical and the recursive Golay set-up in a harmonised way. That means we build the constituent length 16 sequence  $X_1$  as a (generalised) hierarchical sequences whose constituent sequences are again selected to be two (length4) Golay sequences.  $X_2$  is selected to be a Golay sequence.

25 Obviously, selecting hierarchical sequences or Golay sequences again as the constituent sequences, a further saving in complexity can be achieved. However, we found it is necessary to somewhat generalise the definition of the hierarchical sequences (for the hierarchical sequence forming the constituent sequence  $X_1$ ) and to select the best suited parameters for the Golay sequences. This optimisation was done using a computer search.

30

## 3

The construction principle of the hierarchical sequences can be generalised. Up to now one of the constituent sequences was repeated in its full length, the repetitions were modulated with the value of the corresponding element of the other constituent sequence. We now generalise this and allow only the first half (or an other fraction, but we will actually use the half) to be repeated, followed by the second half and the repetitions there of. The repetitions are modulated with the other constituent sequence as was the case for the non generalised hierarchical sequence. We introduce the parameter  $s$  which indicates the part of the constituent sequence which, is repeated as a single chunk.. The formula describing the generalised approach would be:

$$X_1(i) = X_4(i \bmod s + s \cdot (i \div sn_3)) \cdot X_3((i \div s) \bmod n_3) \text{ for } i = 0..n_3 \cdot n_4 \quad (2)$$

Setting  $s=n_4$  would give us again the standard hierarchical sequence.

We now propose to combine the advantages of the generalised hierarchical and the recursive Golay set-up in a harmonised way. That means we build the constituent length 16 sequences of the 256 chip hierarchical sequence from a Golay sequence and a (generalised) hierarchical sequences whose constituent sequences are again selected to be two (length4) Golay sequences.

$X_1$  is defined to be the length 16 Golay sequence obtained by the delay matrix  $D_2 = [8, 4, 1, 2]$  and weight matrix  $W_2 = [1, -1, 1, 1]$

$X_2$  is a generalised hierarchical sequence using the formula above, selectiong  $s=2$  and using the two Golay sequences  $X_3$  and  $X_4$  as constituent sequences.  $X_3$  and  $X_4$  are defined to be identical and the length 4 Golay sequence obtained by the delay matrix  $D_3 = D_4 = [1, 2]$  and weight matrix  $W_3 = W_4 = [1, 1]$ .

Using the following recursive relation as described in

Siemens „A new Hierarchical Correlation Sequence with good Properties in

Presence of a Frequency Error“ 3GPP TSG RAN W1 Tdoc 99/146:

4

$$a_0(k) = \delta(k) \text{ and } b_0(k) = \delta(k)$$

(4)

$$a_n(k) = a_{n-1}(k) + W_n \cdot b_{n-1}(k - D_n) ,$$

$$b_n(k) = a_{n-1}(k) - W_n \cdot b_{n-1}(k - D_n) ,$$


$$k = 0, 1, 2, \dots, 2^N ,$$

$$n = 1, 2, \dots, N.$$

5

While this makes the definition of the sequence somewhat complicated, the correlation becomes much less complex because efficient Hierarchical correlators and Golay correlators can be combined. One possible implementation of the entire correlator could be as shown below. It is called a pruned Golay correlator, because at some stages one of the outputs is pruned and instead the other output is used as input for the next stage.

10

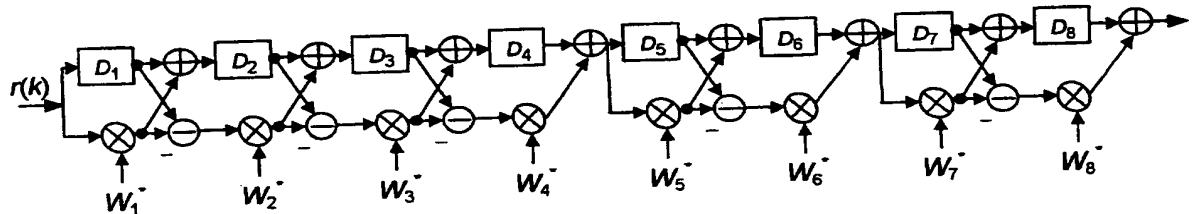

15

Figure 1: Efficient Pruned Golay Correlator for generalised Hierarchical Golay sequence.

20 The vector D is given by  $D = [128, 16, 64, 32, 8, 4, 1, 2]$  and  $W = [1, -1, 1, 1, 1, 1, 1, 1]$ . This correlator only requires 11 adds per correlation output.

We name the code obtained from the working assumption  $S_{\text{new}}$  and the generalised Hierarchical Golay one GHG for the rest of this paper. The latter offers in comparison to a code with plain Hierarchical or Golay based structure additional advantages due to a efficient calculation of correlation sum. Simulations will show, that there is now significant difference in slot synchronisation performance of the presently discussed PSC codes even in presence of a higher frequency error. The benefits of this proposal are as follows:

30



5

- all benefits of the hierarchical sequences are maintained
- The change can be regarded as being only a minor change in the constituent sequences,  $X_1$  and  $X_2$
- the 1<sup>st</sup> step of initial cell search can be executed more efficiently by using the proposed code compared to the Hierarchical only or Golay only scheme
- there is no noticeable difference in slot synchronisation performance between the new choice in comparison to the old selection.

10

#### Complexity comparison of correlation sequences

The complexity of any correlation scheme depends heavily on the selected architecture and technology, so direct comparisons between schemes having a rather different construction principle are very difficult. Therefore it is probably impossible to tell unambiguously, whether the plain hierarchical or the plain Golay sequences show the lower complexity. Basically the Golay sequences need fewer adders while the hierarchical sequences allow a more regular implementation of the delay storage which favours a RAM implementation for an ASIC design. In the following we will compare the Hierarchical Golay sequences against both plain schemes and show they have at most the same complexity, but most likely have a lower complexity than any of the two plain schemes. While this analysis will not provide us with absolute figures (they are too heavily technology dependant) it has the advantage of being almost as convincing as a mathematical proof (but we wont take the burden to try to formulate it in a mathematical way).

#### *Comparison against plain Hierarchical correlation scheme*

The following shows the general correlation scheme for the Hierarchical correlation:

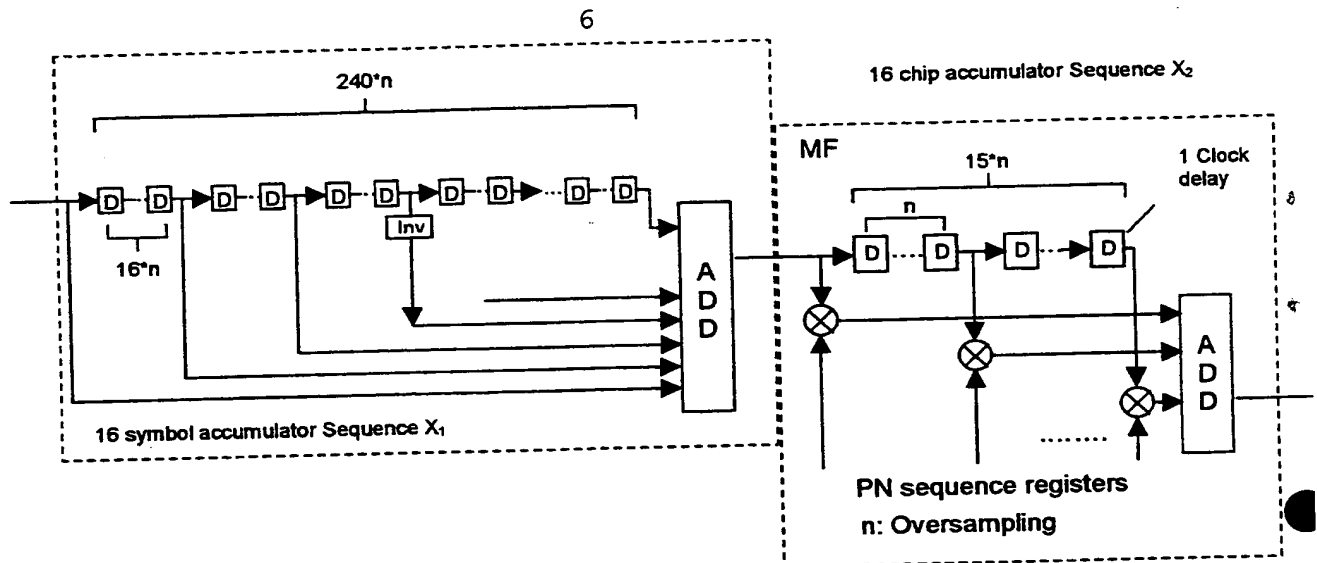


Figure 2: Efficient Correlator for plain hierarchical sequence.

The Hierarchical correlation consists of two concatenated  
 5 matched filter blocks, each performing a standard correlation  
 over one of the constituent sequences. We assume that the  
 correlation over  $X_1$  (16 symbol accumulation) is done before  
 the correlation over  $X_2$  (16 chip accumulation). Note this is  
 possible as an implementation option without changes to the  
 10 standard, because both matched filter blocks (enclosed in  
 dotted lines in the above figure) are linear systems which  
 can be connected in either order. In this way, all the  $240 * n$   
 delay lines can be implemented with the minimum wordlength as  
 no accumulation is done before and therefore no signal to in-  
 15 terference gain is achieved.

The Hierarchical Golay sequence is still at the same time a  
 Hierarchical sequence, so any hardware which is already de-  
 signed can simply be reused for the Hierarchical Golay se-  
 20 quence. This can be done by simply changing the two constitu-  
 ent sequences although a more efficient solution is offered  
 by the (generalised) Hierarchical approach as described abo-  
 ve. This proves, that the new sequences have at most the same  
 complexity as the current working assumption.

Reusing existing hardware may not be of prime importance for  
 25 the commercial terminals to be used when the service is ope-

7

ned to the public, but it certainly eases the design of pre-commercial prototypes to be used in field trial systems and to check interworking with base station prototypes of various vendors to collect valuable experience for the final designs and to assure a smooth launch of the service afterwards.

As mentioned, if felt advantageous for the selected technology, one or both of the matched filter blocks can be replaced again by a (generalised) hierarchical sequence and by an Efficient Golay Correlator (EGC).

The complexity is then almost certainly smaller than for the plain hierarchical correlation. So almost certainly the complexity of the Hierarchical Golay correlation sequence will be lower than the correlation of the plain Hierarchical sequence..

#### Comparison against plain Golay correlation scheme

The following shows the general correlation scheme for the Efficient Golay correlator (EGC):

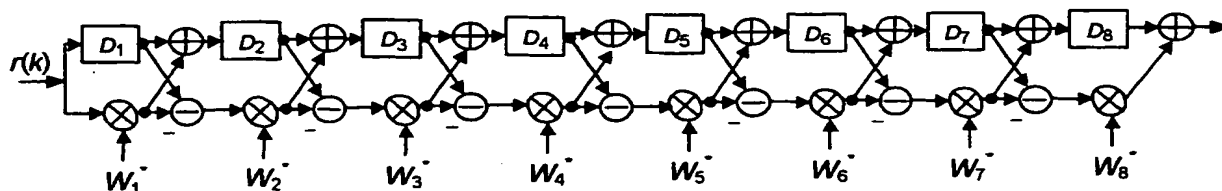


Figure 3: Efficient Golay Correlator for plain Golay sequence.

An efficient Hierarchical Golay correlator has almost the same configuration, except that two adders can be omitted:

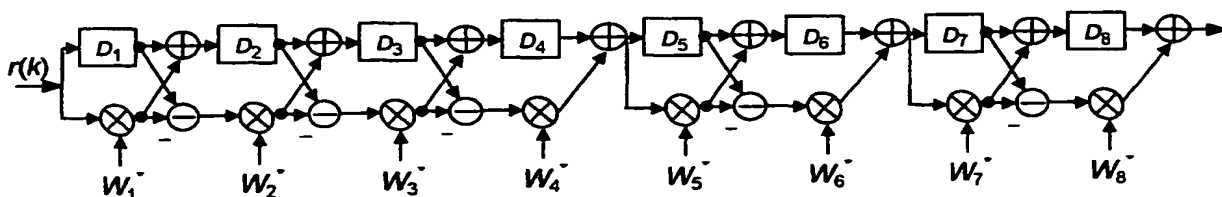


Figure 4: Efficient Golay Correlator for generalised Hierarchical Golay sequence.

Obviously, saving two adders out of 15 will bring down the complexity of the scheme accordingly. Further more, due to the structure of the hierarchical correlation which allows to apply other design optimisations alternatively or together with the EGC, the total saving for an optimised design will most likely be even higher.

#### Simulation performance

We have investigated the slot synchronisation step on a 3 km/h one ray Rayleigh fading channel for different chip to noise ratios (CNR) under no and high frequency error. We show that there is virtually no difference in slot synchronisation performance for the proposed code GHG in comparison to the working assumption  $S_{new}$ . We have results for using 24 slots averaging. Together with the PSC a secondary synchronisation channel is transmitted randomly chosen to be one of 32 symbols as described in Siemens „A new Hierarchical Correlation Sequence with good Properties in Presence of a Frequency Error“ 3GPP TSG RAN W1 Tdoc 99/146

.The plot shows, that there is no significant difference between the current Hierarchical PSC code scheme  $S_{new}$  and the new generalised Hierarchical Golay proposal GHG for no frequency error and even a high frequency error of 10 kHz. Compared to the hierarchical code  $S_{old}$  proposed initially all discussed PSC codes show better properties (especially in presence of higher frequency error)

30

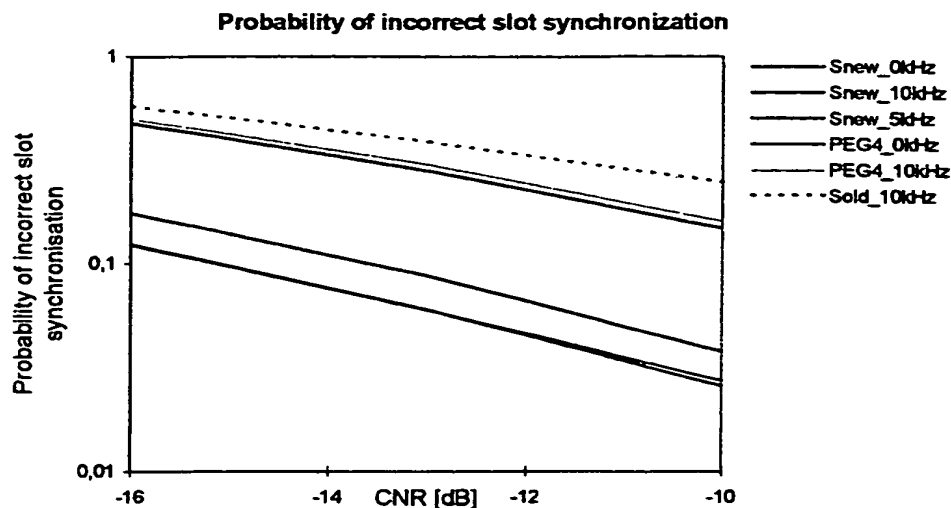


Figure 5: Simulation results <editors note Figure to be updated with the final selection of the code >

The proposed sequence has better autocorrelation properties in particular at 10 kHz than the previous working assumption Sold (broken curve). The plot suggests, that the synchronisation properties of GHG are practically optimal.

### Conclusion

We propose to use the generalised hierarchical Golay sequences to be used for the PSC in order to take advantage of the reduced calculation complexity. The complexity will be reduced from 30 adds per output sample for the present working assumption to 11 adds only. This also outperforms the Golay sequences which would need 15 adds.

As shown by simulations the new PSC selection will still obtain the same performance under both low and high frequency errors. The new PSC scheme can be used together with all currently discussed SSC schemes. Due to a lower computational complexity less dedicated hardware is needed and a lower power consumption is achieved.

Note that previously the sequence was first defined binary (0, 1) and then mapped to a bipolar representation (1, -1).

10

Because the Golay sequences can better be described with the final bipolar representation, only the later is used. Consequently the definition of the hadamard matrix is changed to bipolar representation as well.

### 5 5.2.3.1 Code Generation

The Primary and Secondary code words,  $C_p$  and  $\{C_1, \dots, C_{17}\}$  are constructed as the position wise addition modulo 2 of a Hadamard sequence and a fixed so called generalised hierarchical Golay sequence  $y$ . The Primary SCH is furthermore chosen to have good aperiodic auto correlation properties.

The hierarchical sequence  $y$  is constructed from two constituent sequences  $x_1$  and  $x_2$  of length  $n_1$  and  $n_2$  respectively using the following formula:

$$y(i) = x_2(i \bmod n_2) * x_1(i \operatorname{div} n_2), \quad i = 0 \dots (n_1 * n_2) - 1$$

15

The constituent sequences  $x_1$  and  $x_2$  are chosen to be the following length 16 (i.e.  $n_1 = n_2 = 16$ ) sequences:

$$x_1(i) = x_4(i \bmod s + s * (i \operatorname{div} s n_3)) * x_3((i \operatorname{div} s) \bmod n_3), \quad i = 0 \dots (n_1 * n_2) - 1$$

$x_1$  is a generalised hierarchical sequence using the formula above, selecting  $s=2$  and using the two Golay sequences  $x_3$  and  $x_4$  as constituent sequences.

$x_2$  is defined to be the length 16 ( $N_2=2$ ) Golay sequence obtained by the delay matrix  $D^2 = [8, 4, 1, 2]$  and weight matrix  $W^2 = [1, -1, 1, 1]$

$x_3$  and  $x_4$  are defined to be identical and the length 4 ( $N=2$ ) Golay sequence obtained by the delay matrix  $D^3 = D^4 = [1, 2]$  and weight matrix  $W^3 = W^4 = [1, 1]$ .

The Golay sequences are defined using the following recursive relation:

$$\begin{aligned} a_0(k) &= \delta(k) \text{ and } b_0(k) = \delta(k) \\ a_n(k) &= a_{n-1}(k) + W_n \cdot b_{n-1}(k - D_n) , \\ b_n(k) &= a_{n-1}(k) - W_n \cdot b_{n-1}(k - D_n) , \\ k &= 0, 1, 2, \dots, 2^N , \\ n &= 1, 2, \dots, N. \end{aligned}$$

35

$a_N$  then defines the wanted Golay sequence.

The Hadamard sequences are obtained as the rows in a matrix  $H_8$  constructed recursively by:

$$H_0 = (1)$$

$$5 \quad H_k = \begin{pmatrix} H_{k-1} & H_{k-1} \\ H_{k-1} & -H_{k-1} \end{pmatrix}, \quad k \geq 1$$

The rows are numbered from the top starting with row 0 (the all ones sequence).

The Hadamard sequence  $h$  depends on the chosen code number  $n$  and is denoted  $h_n$  in the sequel.

This code word is chosen from every 8<sup>th</sup> row of the matrix  $H_8$ .

10 Therefore, there are 32 possible code words out of which 18 are used.

Furthermore, let  $h_n(i)$  and  $y(i)$  denote the  $i$ :th symbol of the sequence  $h_n$  and  $y$ , respectively.

15 Then  $h_n$  is equal to the row of  $H_8$  numbered by the bit reverse of the 8 bit binary representation of  $n$ .

The definition of the  $n$ :th SCH code word follows (the left most index correspond to the chip transmitted first in each slot):

$$20 \quad C_{SCH,n} = \langle h_n(0) * y(0), h_n(1) * y(1), h_n(2) * y(2), \dots, h_n(255) * y(255) \rangle,$$

The Primary SCH and Secondary SCH code words are defined in terms of  $C_{SCH,n}$  and the definition of  $C_p$  and  $\{C_1, \dots, C_{17}\}$  now follows as:

$$25 \quad C_p = C_{SCH, 0}$$

and

$$C_i = C_{SCH,i}, \quad i=1, \dots, 17$$

The definitions of  $C_p$  and  $\{C_1, \dots, C_{17}\}$  are such that a 32 point fast Hadamard transform can be utilised for detection.

30

**THIS PAGE BLANK (USPTO)**



## Claims:

1. Method of transmitting and/or receiving synchronisation sequences, whereby the sequence is composed of two constituent sequences whereby the first sequence is repeated as often  
5 as there are elements of the second sequence, whereby all elements of the first sequence of a specific repetition are modulated with the same element of the second sequence, whereby the repetitions of the first sequence are inter-  
10 leaved with each other.
2. Method of transmitting and/or receiving synchronisation sequences, whereby the sequence  $S(i)$  of length  $(n_1 * n_2)$  is composed of two constituent sequences  $x_1$  and  $x_2$  of length  $n_1$   
15 and  $n_2$  according to the formula  $S(i) = x_2(i \bmod s + s * (i \text{ div } s n_2)) * x_1((i \text{ div } s) \bmod n_1)$ ,  $i = 0 \dots (n_1 * n_2) - 1$ .
3. Method of transmitting and/or receiving synchronisation sequences, as claimed in any of the preceding claims, whereby  
20 the constituent sequences are themselves composed from other constituent sequences as described above or from Golay sequences.

**THIS PAGE BLANK (USPTO)**

18. Mai 1999

13

## Abstract

Method of transmitting and/or receiving synchronisation sequences

5

A synchronisation sequence is composed of two constituent sequences whereby the first sequence is repeated as often as there are elements of the second sequence, whereby all elements of the first sequence of a specific repetition are modulated with the same element of the second sequence, whereby the repetitions of the first sequence are interleaved with each other.

10

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- 
- ☐ **BLACK BORDERS**
- 
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**